

768930 – V-Fold Flap Kit

For small Seeds (canola, sugar beets)

Installation Guide



NOTE:


- It is recommended to keep this kit installed in a vSet2 cover that is used only for small seed crops (canola, beets, sorghum) and use a standard vSet2 cover for other crops.
- This kit is to be installed on the right-hand side rows of “V” fold type frames or any frame type which has row units that are turned 90° on their side when the planter bar is folded.

1. Remove the existing baffle from the vSet2 cover.

- a. Remove the locking screw of the baffle, and keep it to reinstall the new baffle:





- b. Push the baffle up, just above position “4” so the small tab is clear of the meter. Then remove the baffle from the vSet2 cover.

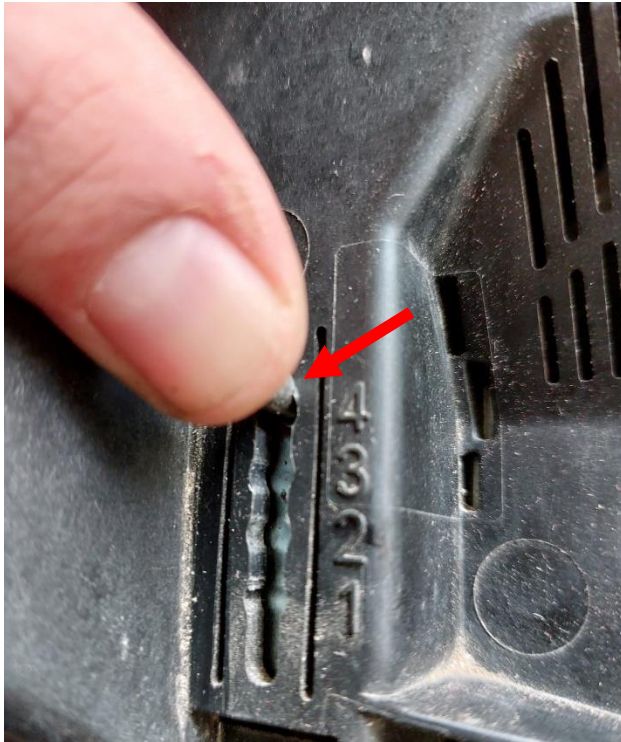

c.

2. Replace the existing baffle with the new one, and put it in position “1”

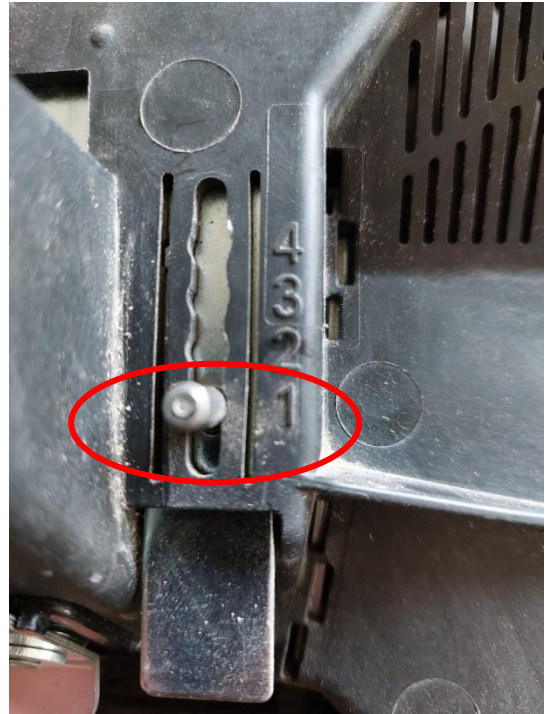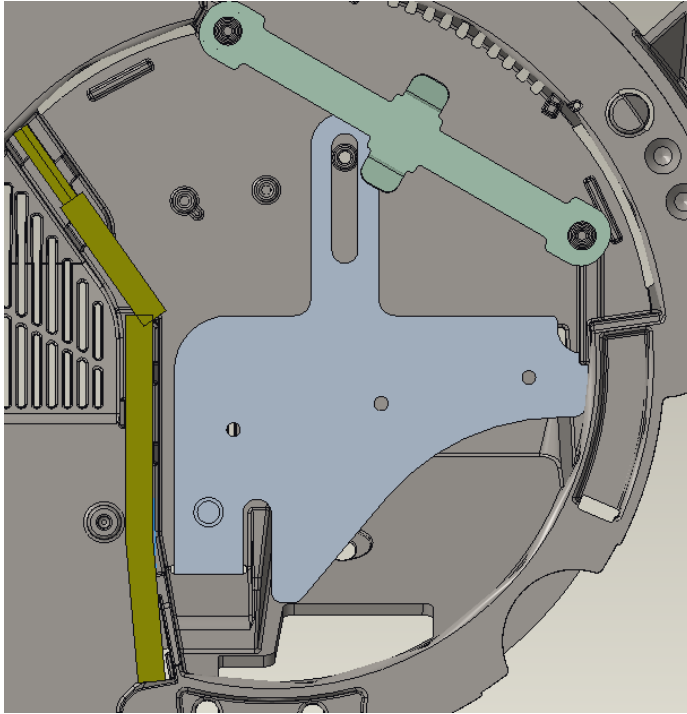

3. Install the long brush on its bracket and assemble it on the bent plate as shown, using the 3 screws:




4. Pre-assemble the metal flap on its bracket as shown:



5. Mount the small brush on its bracket, and pre-assemble the small brush with the flap, as shown below:



6. Place the bent plate on top of the baffle, using the small M3 screw and the left hole.

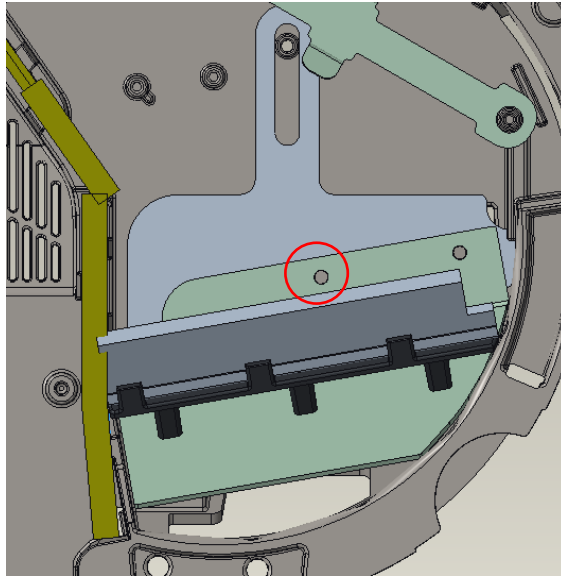

7. Lock everything by installing the pre-assembled small brush and flap (from step 5) on the right hole, with the longer M3 bolt.

Note: The baffle must remain in position 1 while planting small seeds

