

-

Diagram illustrating the connections for Detail A: Smart Connector Connections.

The central component is the Smart Connector unit. It is connected to three external components:

- Seed Repeater**: Connected to the left side of the Smart Connector unit.
- Sensor Backbone Harness**: Connected to the bottom of the Smart Connector unit.
- Planter Harness**: Connected to the right side of the Smart Connector unit.

Case 1255 24R30			
Item	Part NO	Description	QTY
1	725154	GEN 3 Tractor CAN Harness	1
2	729139	CAN Extension - 50'	1
3	725937	Sensor Backbone	3
4	729933	8 Pin Row Harness Extension - 30'	1
5	Various	SRM Backbone Harness	1
6	72592(0-4)	2 Pin Weather Pack Ext. Harness	1
7	725191	2 Pin Weather Pack to Apex Adapter	1
8	729039	4 Pin Cap	1
D	729039	SRM Backbone Row Plug	1

Diagram illustrating a T-junction configuration. The horizontal run is 144 inches. The vertical risers are 24 inches high. The vertical section has a 90-degree bend and a 10-inch vertical segment. The horizontal section has a 4-inch vertical segment.


Detail B: Backbone Power

The diagram shows a vertical assembly of components for backbone power. At the top is a red 'B+' label. Below it is a 2-pin weather pack extension (72592(0-4)), indicated by a circled '6' and an arrow. This is followed by a 2-pin weather pack to 2-pin apex adapter (725191), indicated by a circled '7' and an arrow. The assembly ends with a red wavy line symbol.

B+

2 Pin Weather Pack Extension
72592(0-4)

2 Pin Weather Pack to 2 Pin Apex adapter (725191)

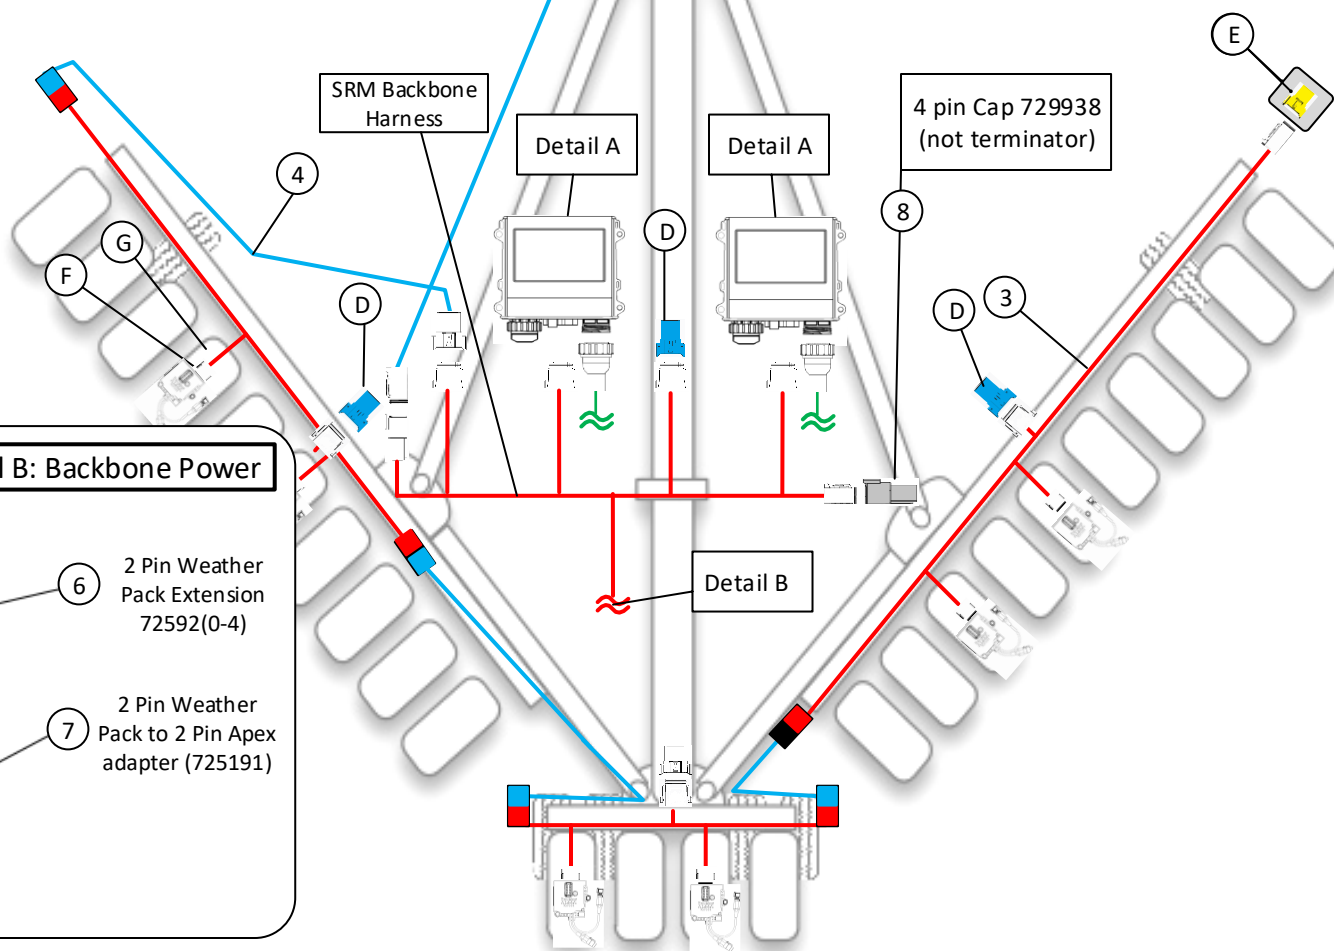

Callout A: Power Distribution Module (PDM)

