


CASE IH 2000 Series Push Button Lift Switch Installation

This document includes steps for installing lift switch 726795 on CASE IH 2000 series row units.


Step 1:

Identify rows on the planter the push button switches will be installed. The bracket will install on the right side of the w-plate utilizing the two holes shown (1).

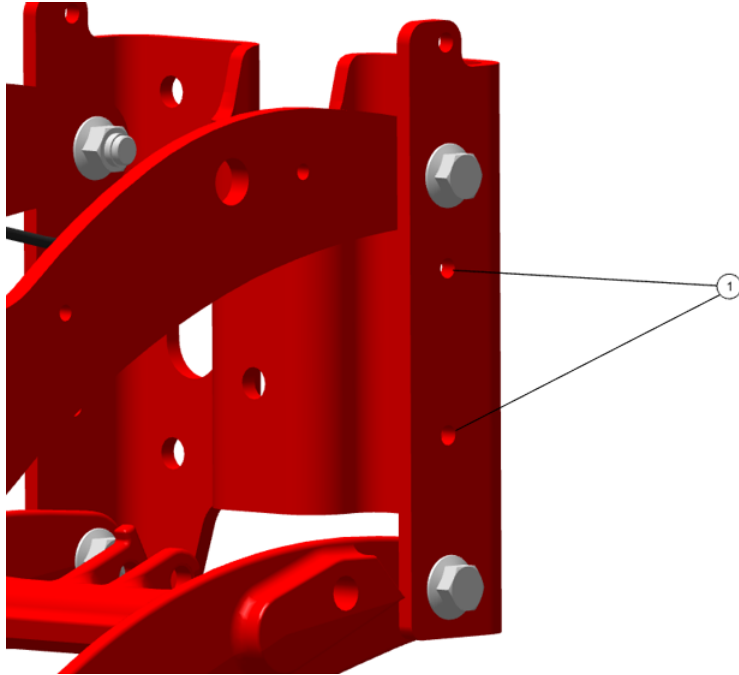


Step 2:

Position the bracket on the outside of the w-plate and align the holes in the bracket and w-plate. The lift switch will be on the inside of the w-plate.

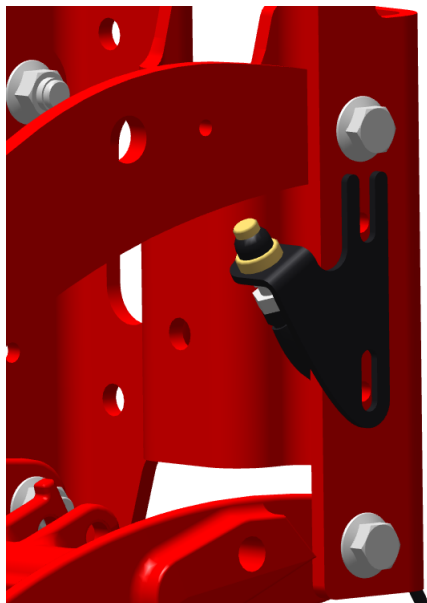

Step 3:

Install the supplied hardware through the lift switch bracket and w-plate as shown.

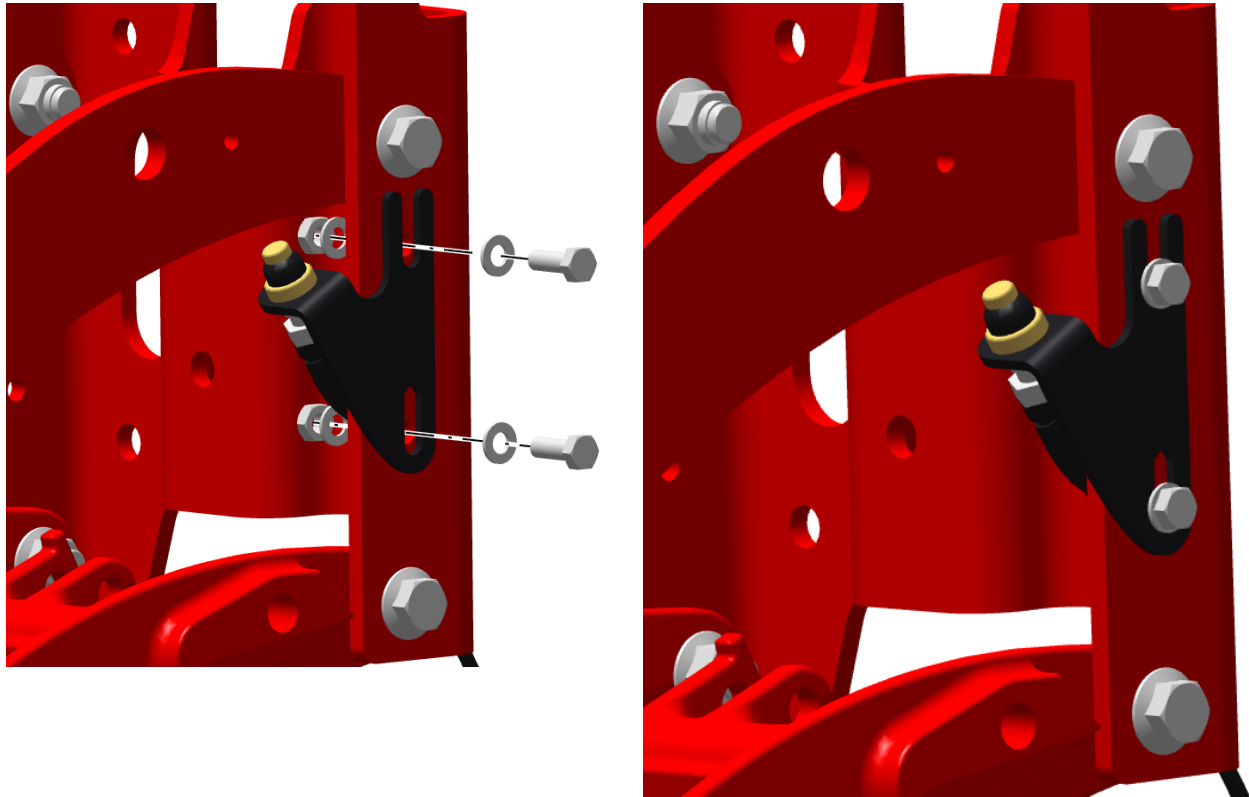

Note: The bracket can be adjusted as needed to engage and disengage the switch properly when the planer is lifted and lowered.

Step 4:

Tighten the hardware with the lift switch in the correct position.

Gen 3 20/20 Setup and Calibration

Add “Push-Button Lift Switch” under the lift switch setup to the appropriate rows and calibrate the switches through the 20/20. Refer document 955709 “20/20 Operators Guide for Planters — Gen 3” for more details.

Gen 2 20/20 Setup and Calibration

In order for the Gen 2 20/20 to read the direct lift state signal correctly, a separate file must be installed on the 20/20. Refer to document 9551016 “Gen 2 Hex File Download and Install” for instructions on loading the file. Once the file is loaded, calibrate the lift switches on the 20/20.