



DBM CAN Harness	
CAN A Network	
CAN B Network	
CAN Terminator	
SRM Backbone	

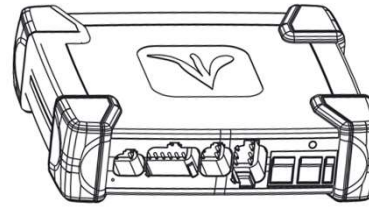

DBM is located in the cab of the tractor. Harness 725154 carries CAN A & CAN B

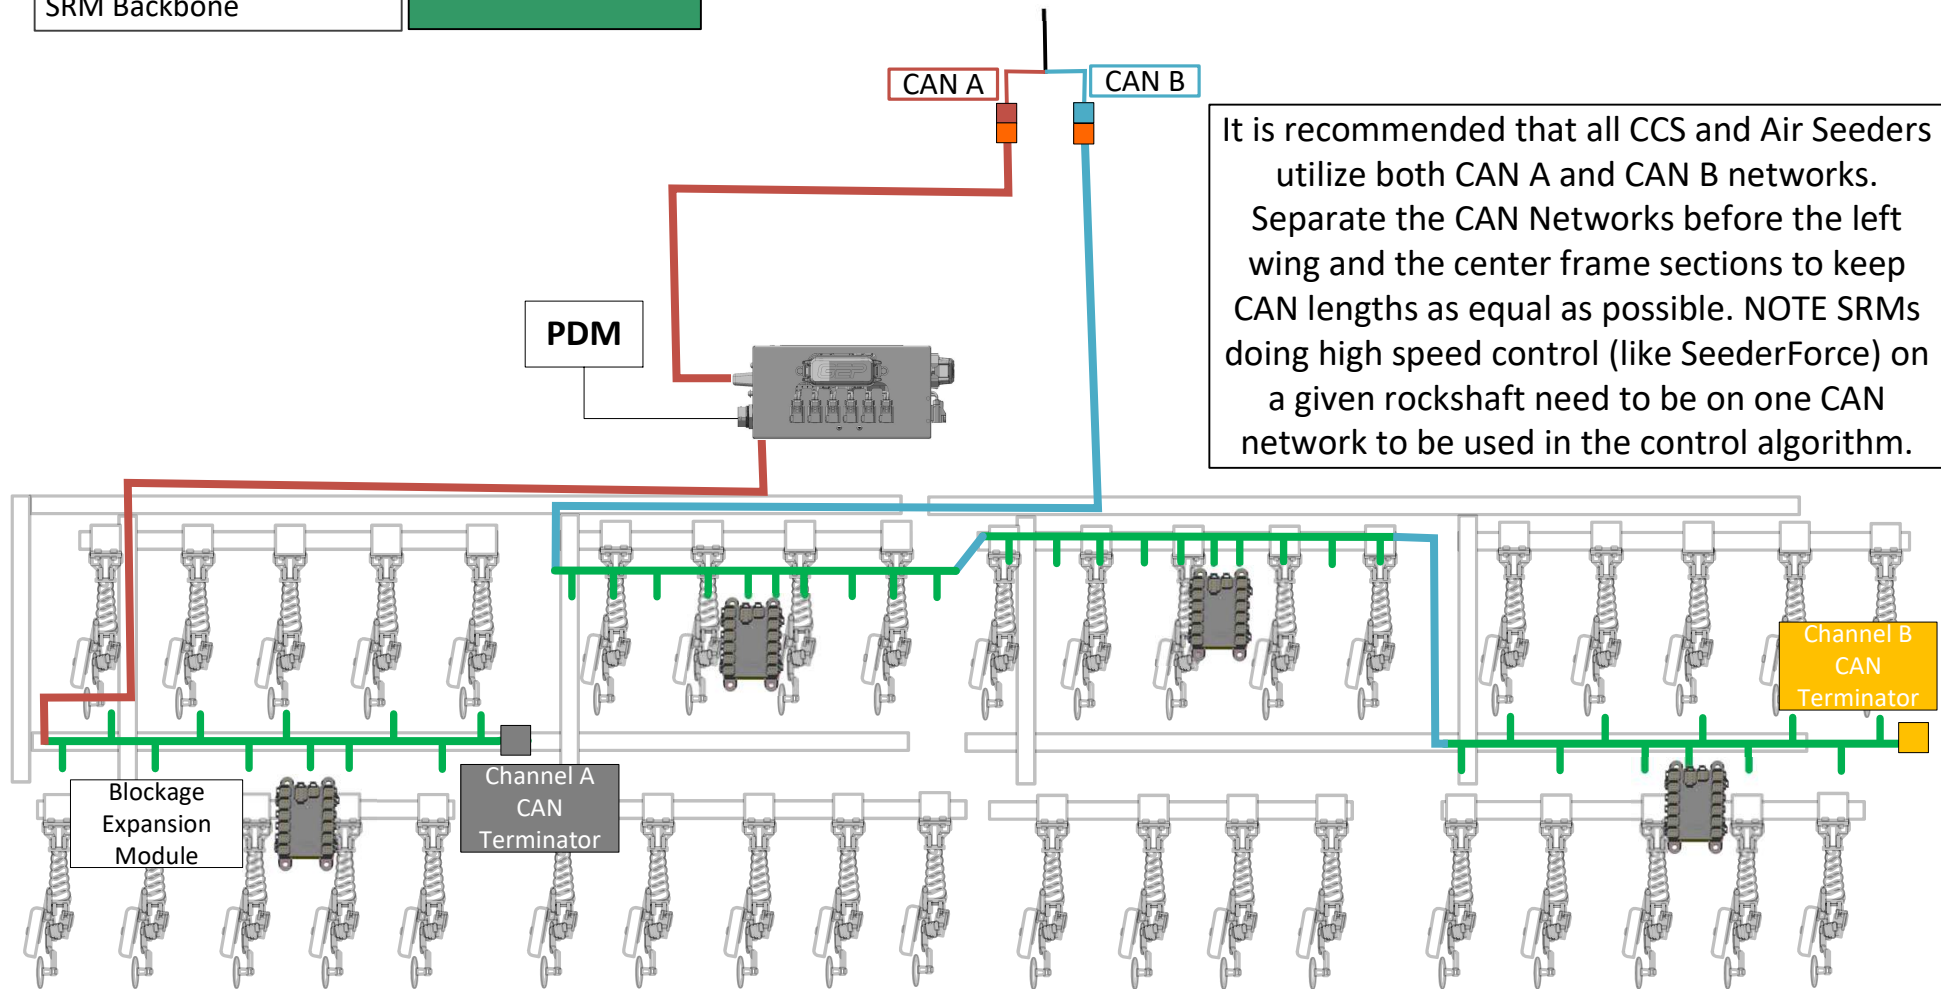

It is recommended that all CCS and Air Seeders utilize both CAN A and CAN B networks. Separate the CAN Networks before the left wing and the center frame sections to keep CAN lengths as equal as possible. NOTE SRMs doing high speed control (like SeederForce) on a given rockshaft need to be on one CAN network to be used in the control algorithm.