

Installation Instructions for Flap Kit Rows


Use on 1790 20" row planters and where eSet will be installed on 15" row units. This flap has been designed to help prevent seed from flowing out of the hopper and into the CCS hose when the wing rows are up. We recommend placing these flaps in all meters on every row of the planter.

Parts List

1. Flap, (4)
2. Brush Base, (4)
3. Brush, (4)
4. Screws, (8)



Installing The Flap

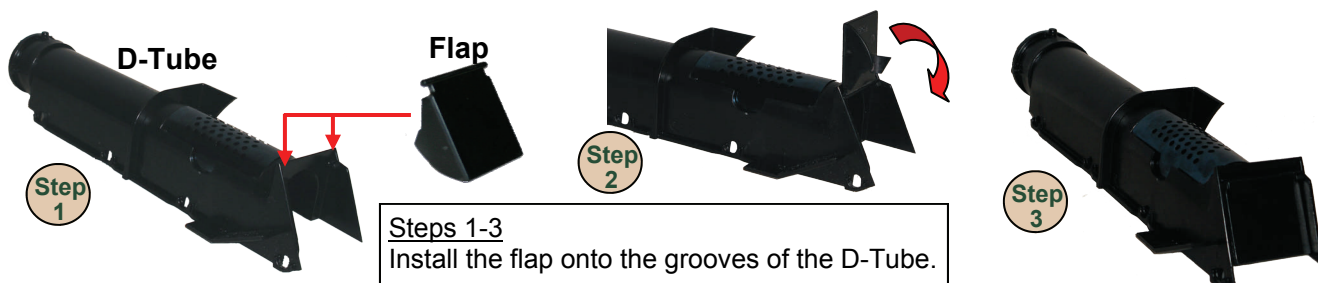


Installing The Brush





Slide the D-Tube onto the hopper and make sure the flap is down, then secure the D-Tube to the hopper using the screws.

Place the brush on the two studs sticking up from the liner.

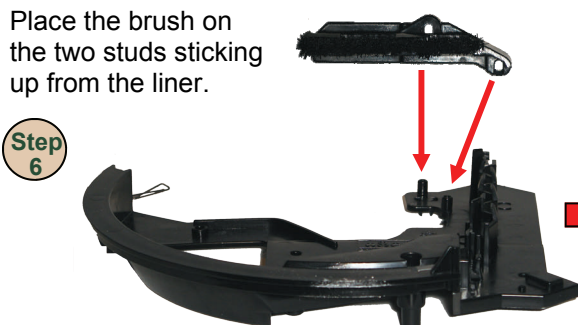

Step 5 Slide the brush onto the brush base as shown.

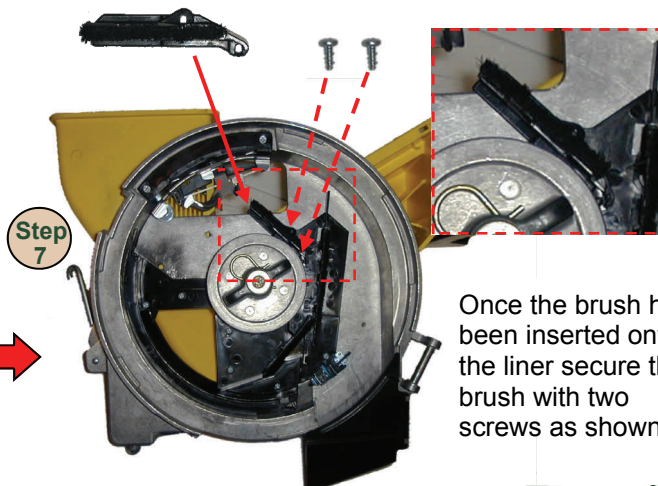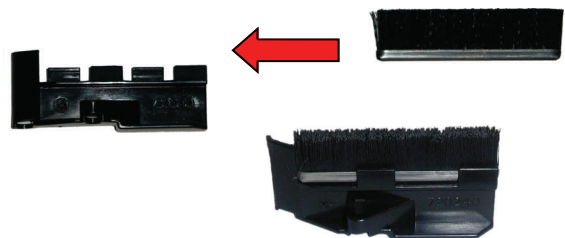

Once the brush has been inserted onto the liner secure the brush with two screws as shown.

Questions? Check the website: www.precisionplanting.com or call us at 309-925-5050.