
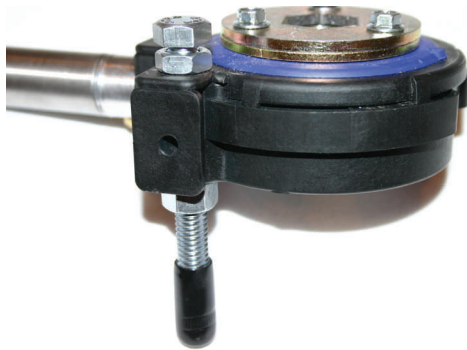


Installation Instructions for Tru Count Air Clutch on JD Pro Series Meter with eSets

Tru Count Air Clutch is adaptable to function with Pro Series eSet. Because of the different shape of the Pro Series eSet hopper, you will need additional parts which can be easily acquired at your local hardware store.

Replace the 3/8" bolt that is included in your kit with a 3/8" by 3 1/2" bolt. You will also need a second 3/8" nut.



Screw one of the 3/8" nuts all the way up to the head of the bolt. Insert the bolt through the hole in the clutch. Thread on the second nut but do not tighten all the way. Slide the rubber protector over the end of the bolt.

Slide the clutch onto the drive shaft and secure with the provided clip. Adjust the nuts so that the rubber tip of the bolt rests on the hopper box and both nuts are tight against the clutch. There will be a small gap between the head of the bolt and the top nut (about 1/8"). Once installation is complete, secure the rubber tip to the support strut on the hopper using a zip tie.

