

## Max Emerge 5 Singulator Base Upgrade

eSet is compatible with the John Deere vac meter on an ME5 row unit with the use of a new singulator base. Existing singulator bases can be modified to fit in this meter.


### Step 1

#### Remove the T-spring



The T-spring is pried up above the two tabs (fig 1a), then slide the spring out and away from the housing (fig 1b).

**\*\*The kit will include a new T spring although the two are interchangeable.**


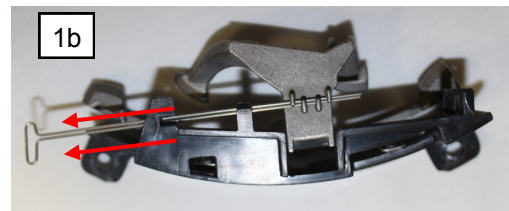


### Step 2

#### Remove the W-spring




The W-spring can be removed by pressing down on each side of the spring (fig 2a) and releasing it from the two tabs keeping it in place as shown in (fig 2b).

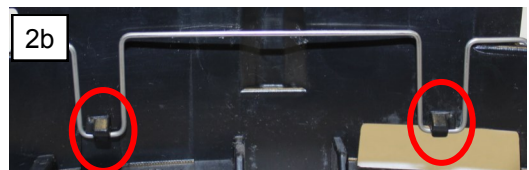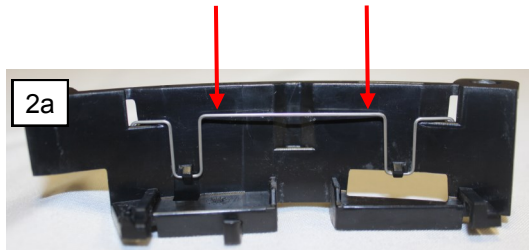

### Step 3

#### Reinstalling springs and singulator

Insert the W-spring by placing it back under the two tabs from (fig2b). Now insert the T-spring through the tabs located on the base and the singulator (fig3a) and slide it until it is completely tight with the originally two tabs in (fig1a).

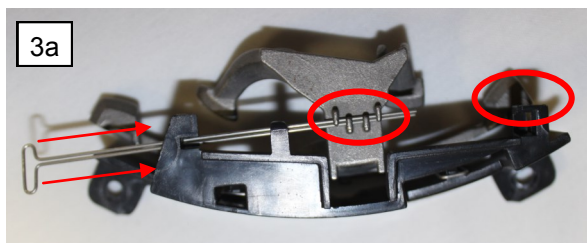

Additional instructions are available at <http://cloud.precisionplanting.com/pubs>