


Heavy Duty Hopper Retention Latch Kit (736300)

Step 1:

Remove the existing latch from the rear post.

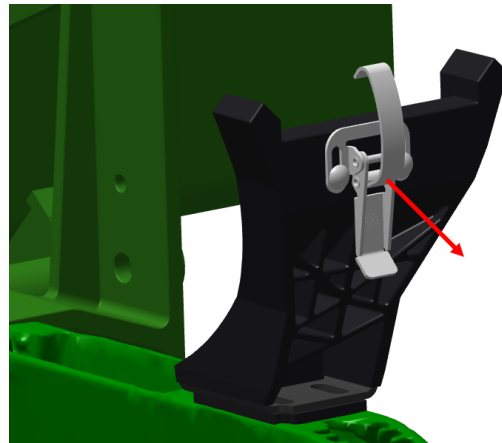


Step 2:

Align the latch on the predrilled holes in the post. Use the screws provided in the kit to attach the latch.





Step 3:

Use a screwdriver to hand tighten until screws are seated against the post and then add an additional $\frac{1}{4}$ turn. Do not overtighten.

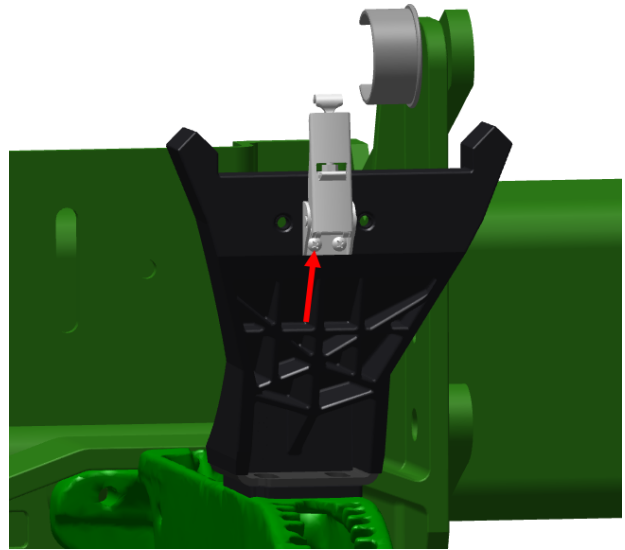**Step 4:**

Center the hopper plate into the latch cavity. Mark the mounting holes and using an $\frac{1}{8}$ " drill bit, drill two pilot holes into the back of the hopper. Insert the hopper plate back in place. Secure the hopper plate using the two provided screws. Tighten until screw is seated against the hopper and then add an additional $\frac{1}{4}$ turn. Do not overtighten.

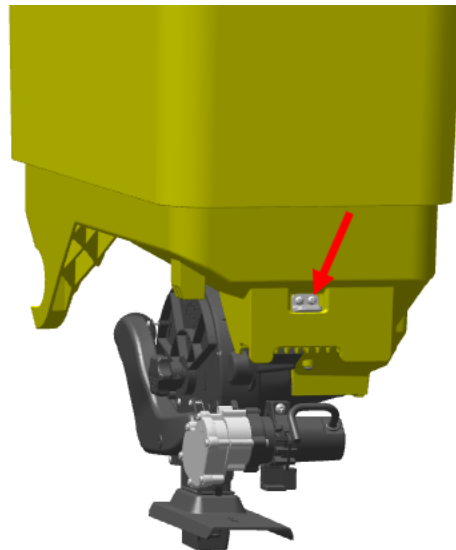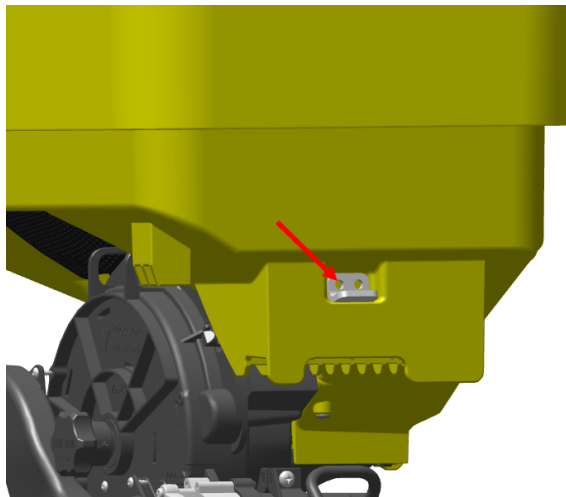

Step 5:

Place the hopper back in the row unit. Lock the hopper in place with the HD latch. It may be necessary to adjust the threaded hook so the hopper is secure against the post.

