


vDrive 2.0 Release Notes

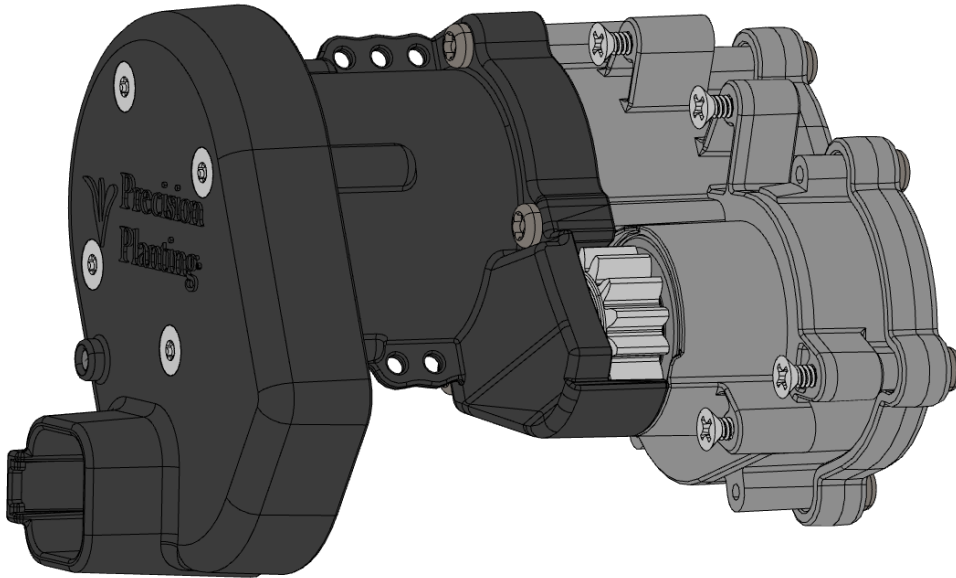

This document highlights the differences between the original vDrive motor **730050** (now referred to as vDrive 1.0) and vDrive 2.0 **730550**.

The main feature of vDrive 2.0 is an integrated 6-pin CAN connection. In addition, the vDrive 2.0 service/upgrade kit (**730597**) may be used to replace a failed vDrive 2.0 module or to upgrade a vDrive 1.0 module to the 2.0 style.

vDrive 2.0 is compatible with both Gen 2 and Gen 3 displays. vDrive 2.0 and vDrive 1.0 can be mixed on the same planter with no concerns.

The following configurations **require** the use of vDrive 1.0 because of space constraints:

- vSet 2 meters on CaseIH 2100 series planters
- vSet Classic
- vDrive Insecticide
- vSet Select
- Monosem row units
- Gaspardo row units

Note: The vSet2 meter with vDrive installed will now always include vDrive 2.0. If, because of one of the above incompatibilities, vSet 2 meters with vDrive 1.0 are needed, it will be necessary to order the meter without vDrive installed along with vDrive 1.0 and the vDrive conversion kit (**768332**) separately for assembly when the parts are delivered.

The physical differences between vDrive 1.0 and vDrive 2.0 are depicted in the following illustrations.

