


vSet 2 Flap Kit Install

This kit should be installed with vSet 2 meters on planters to prevent seed from flowing out the meter exit when the planter is folded for transport. The kit includes brush holders for both vSet 2 with conventional seed tube delivery as well as vSet 2 with SpeedTube delivery. Though all rows will not require this kit, it is recommended that the kit be installed on all rows in case meters/hoppers are moved to a different row.

QTY	Part Number	Part Name	Description
4	700140	Screw	Hinged Holder Screws
1	730525	Flap Assembly	CCS Coupler
2	768357	Brush	Transport Brush
1	768396	Hinged Holder	Seed tube
1	768397	Hinged Holder	SpeedTube
1	768847	Flap	SpeedTube Flap
1	768848	Flap	Seed tube Flap


Step 1:

Select the correct brush holder and flap for your application. Install the brush on the hinged holder you will be using for your meter.

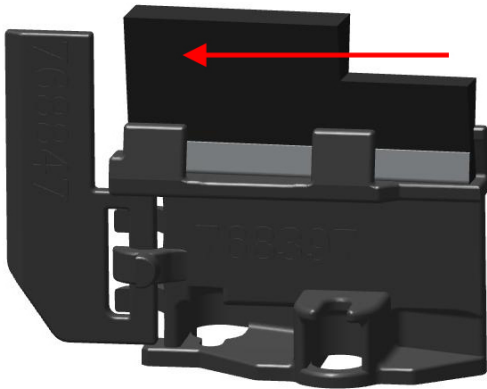

SpeedTube Hinged Holder—768397

SpeedTube Flap—768847

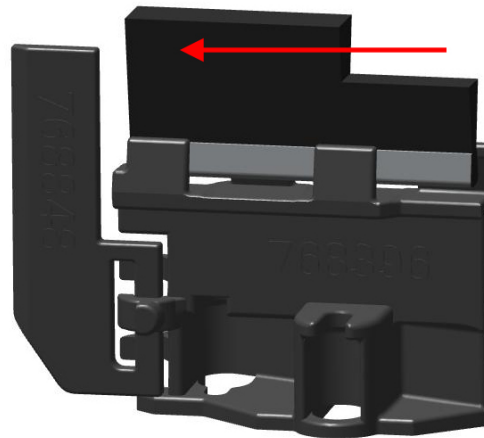


Seed tube Hinged Holder—768396

Seed tube Flap—768848


Step 2:

Locate the mounting studs in the meter cover as shown circled below. Install the brush and holder into the cover. The holder should sit flush with the cover. The 768397 will not seat properly in a seed tube version housing.

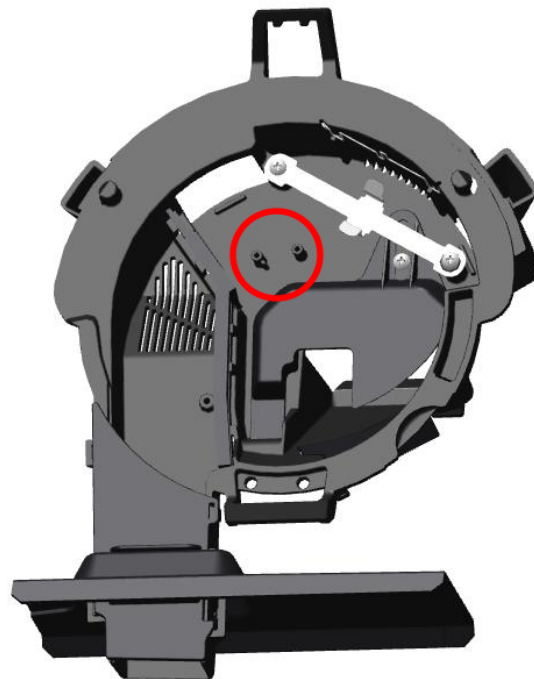

Step 3:

Tighten the provided screws until the bottom of the screw heads touch the brush holder. Then, tighten an additional 1/4 turn. Do not over tighten. The flap should be on the bottom side of the upper brush of the meter as seen in the picture.

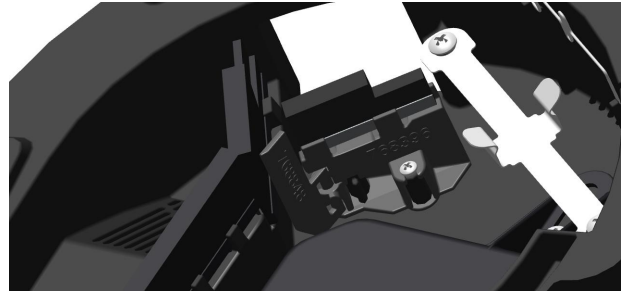**Step 4:**

Install o-ring (720205) into flap assembly (730561).

**Step 5:**

Install assembly onto d-tube part number facing up.

