

Components Described

- **768428** Upper Brush for Medium and Large Edible Beans, Large Edible Sunflowers, and Peanuts
- **768379** Upper Restrictor Brush for Hill Drop Cotton
- **768335** Wiper Kit for Canola
- Modifications for Peanuts

This document describes additional components necessary for certain crop kits with vSet meters. These components are needed to maintain proper performance for these specialty crops.

Upper Brush Kit (768428): Use with Medium Edible Bean (768349), Large Edible Bean (768343), and Peanut (768429) Crop Kits as well as with large edible sunflower components.

Install: Insert the Upper Brush by sliding it between the brush tabs until it is secured to the outside of the meter cover. Orient the brush with the bristles towards the inside of the meter cover, seen in Figure A.

Remove: To switch to other crops, press outward on the end nearest the exit chute and pull downward.

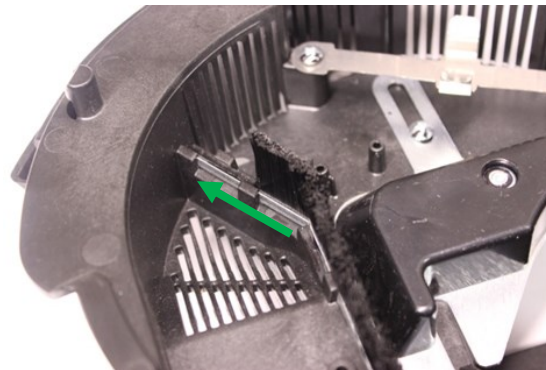


Figure A

Upper Restrictor Brush Kit (768379): Use with 2-Seed Hill Drop (768344) and 3-Seed Hill Drop (768345) Cotton Kits

Install: Insert the Upper Restrictor Brush by sliding it between the brush tabs until it is secured to the outside of the meter cover. Orient the brush as seen in Figure B.

Remove: To switch to other crops, press outward on the end nearest the exit chute and pull downward.

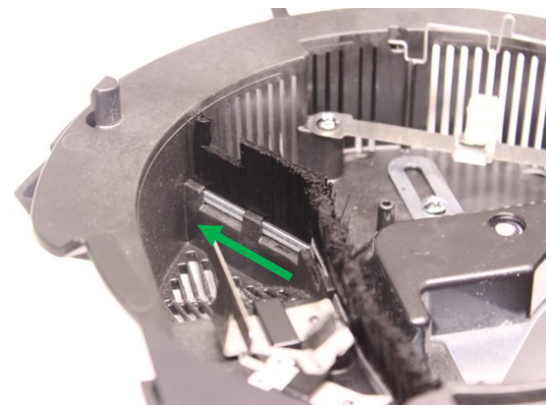



Figure B

vSet[®] vSet Specialty Crop Additional Components

Wiper Kit (768335): Use with Canola (768348) Crop Kit

Parts List

- **720046** Screw (Qty. 1)
- **720306** Brush Seed Extractor (Qty. 1)
- **768336** Canola Wiper (Qty. 1)
- **768337** Base (Qty. 1)

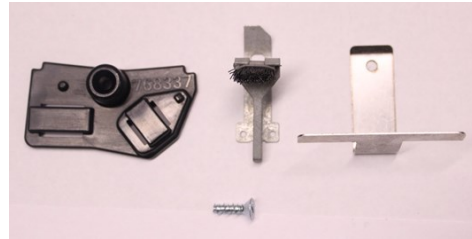

Step 1: Insert the Brush Seed Extractor (720306) into the Base (768337). The extractor will lock in place as shown in Figure C1.

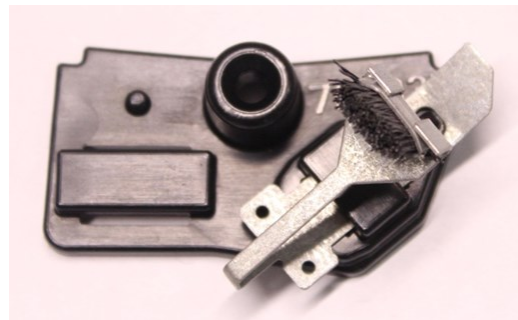


Figure C1

Step 2: Insert the Wiper (768336) into the Base (768337). The wiper will lock in place as shown in Figure C2.

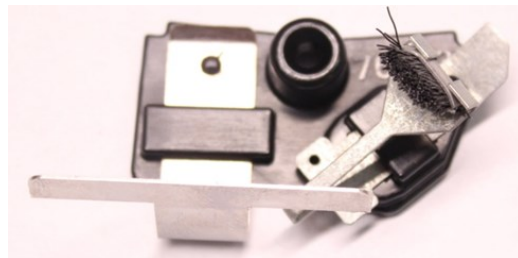


Figure C2

Step 3: Screw the Base (768337) into the meter cover as shown in Figure C3. Turn to touch plus 1/4 turn. **Do Not Over Tighten.**



Figure C3

vSet[®] vSet Specialty Crop Additional Components

Large Peanuts: Some larger peanuts require the removal of the baffle from the meter cover to prevent seed bridging. Follow the instructions below to remove the baffle.

Step 1: Slide the baffle above position 4 and remove the single screw holding the baffle to the meter cover using a Philips head screwdriver as shown in Figure D1.

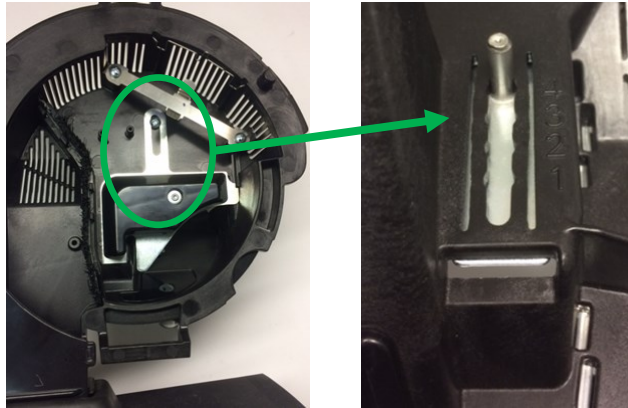


Figure D1

Step 2: Flip the cover around and press on the setting peg as shown in Figure D2. The baffle will fall out of the cover.

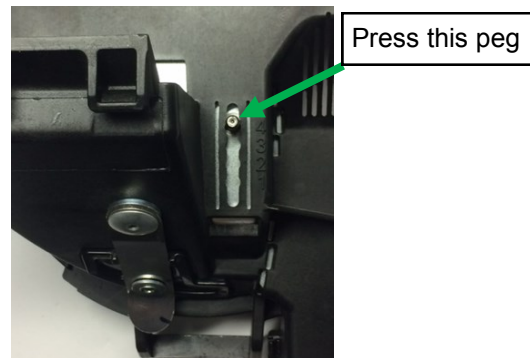


Figure D2

Step 3: To reinstall the baffle, align the peg to position 4, insert the right side of the baffle steel into the cover, gently press into place, and secure with screw. Tighten to touch plus 1/8 turn. **Do not overtighten.**



Figure D3