



vSet Gravity Hopper Update

Precision Planting®


vSet Gravity Hopper Update

When planting small seeds like sugar beets or canola, there is a potential to leak these small seeds at the joints where the funnel of the vSet2 Gravity Hopper Kit (768750) aligns with the meter cover. **If you are not planting small seeds, no action is required.** If you are planting small seeds like sugar beets or canola, continue reading for instructions on how to seal these joints and prevent the seed from leaking.

Note: The instructions use white silicone to help illustrate the process. You can use black silicone to match the parts being sealed.



Step 1: First seal the joint between the meter cover and the bottom of the gravity hopper funnel.

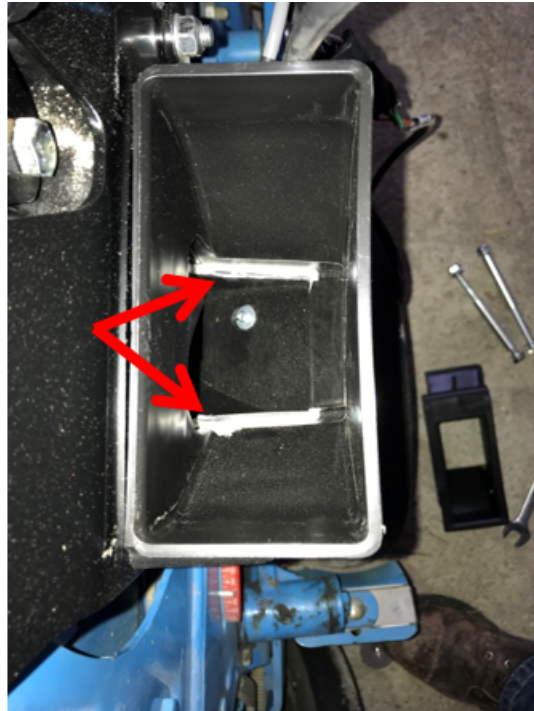

Step 2: Seal the joint in the middle of the gravity hopper funnel by applying silicone on the upper half's lip as shown below.



Step 3: The last place to apply silicone is around the joint between the top of the gravity hopper funnel and the bottom of the seed hopper. After re-attaching the hopper confirm none of the silicone is blocking the passage of the seed.

