

WaveVision Installation on Case IH

Contents:

156731 Clevis Pin, 1/4" x 1.75" Zinc (Qty 1.)

156981 Cotter Pin 21-04 HIT Clip (Qty.1)

700267 Bracket, Case IH 1200 WV (Qty. 1)

700270 Screw, 3/8"-16 x 3/4" GD 8 (Qty. 1)

700271 WaveVision Seed Tube (Qty. 1)



Use these instructions to install the 700269 WaveVision on a 2009 or newer Case IH row unit with vSet and vDrive installed.

Step 1

Remove Case IH seed tube from planter row unit



Figure 1

Step 2

Remove lower bolt from shank boot using 3/8" ratchet with extension and replace with 3/8"-16 x 3/4" GD 8 screw (700270). This screw does not have a built-flange, allowing for proper clearance.



Figure 2a

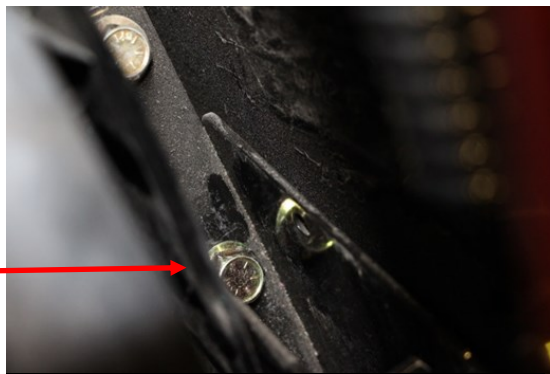
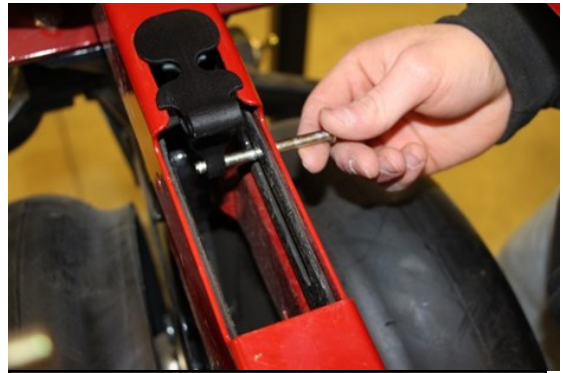



Figure 2b

Step 3

Slide the 700267 bracket onto the row unit (Figure 3a) then slide the pin from the original seed tube into the bottom hole on the bracket (Figure 3b).

*Figure 3a**Figure 3b***Step 4**

Slide the WaveVision tube (700271) into position and secure with provided pin (156731) and clip (156981). To remove the WaveVision tube for replacement or maintenance, remove the pin (156731) and pull up.

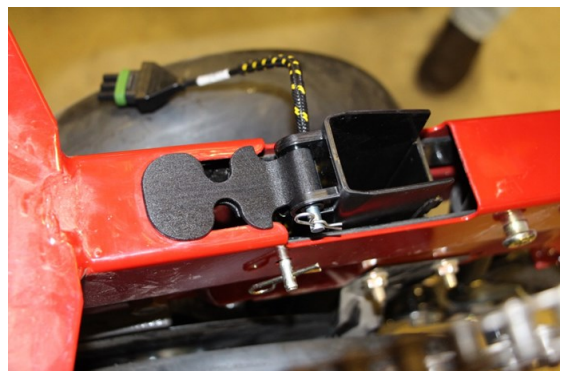*Figure 4*