


- A  12 Pin to DBM
- B  8 Pin
- C  8 Pin to Male
- D  8 Pin CAP
- E  8 Pin CAN Terminator
- F  12 Pin SRM Plug
- G  6 Pin Row CAN

### Detail A: Smart Connector Connections

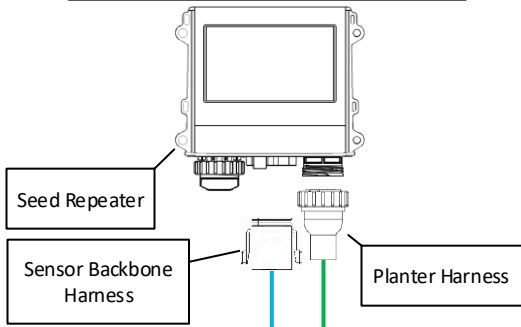

### Gen 3 Sensing Architecture

#### White 8816 & 9816 16R30

| Item | Part NO | Description                 | QTY |
|------|---------|-----------------------------|-----|
| 1    | 725935  | GEN 3 Tractor CAN Harness   | 1   |
| 2    | 725932  | 8 Pin Row Harness Ext - 20' | 1   |
| 3    | 725937  | Sensor Backbone             | 3   |
| 4    | 729040  | 8 pin Row Harness Ext - 5'  | 3   |
|      |         |                             |     |
|      |         |                             |     |
|      |         |                             |     |
|      |         |                             |     |
|      |         |                             |     |
|      |         |                             |     |
|      |         |                             |     |

**Note:** White planters with Dickey John monitors will require a 725234 Adapter Harness between the Smart Connector and planter harness. All other monitors will require a new planter harness (see Order Guide).

